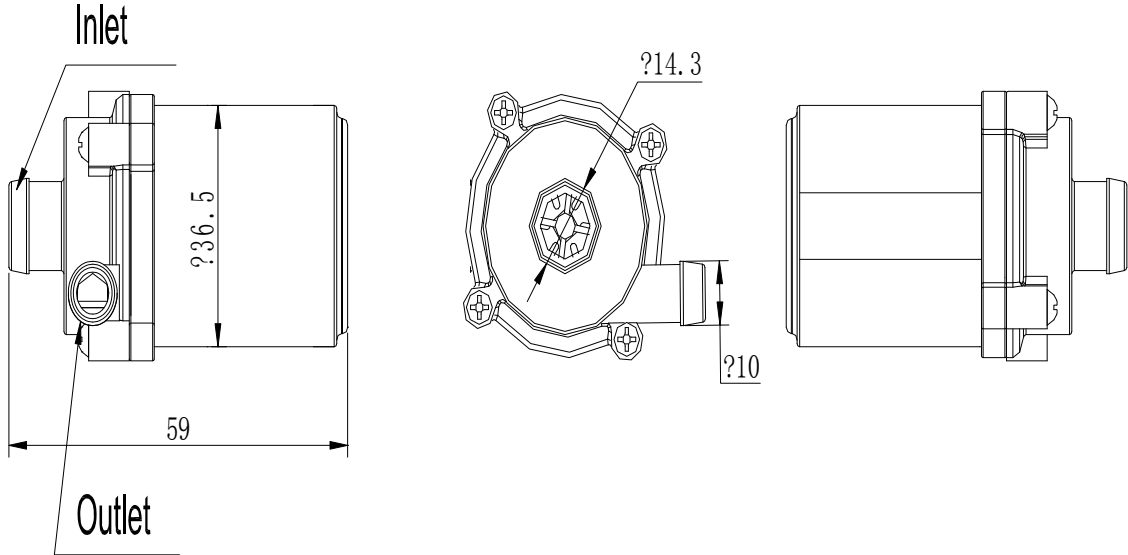


Customer			Model		Edition	A0
Out Dimension						
direction of outlet			wire	red(+) and black(-)		
bracket	yes		Rotation	CCW		
NO.	I (mA)	I/h	I/Q	Voltage	Voltage	Voltage
	(Noload current)	Max. Water Head (At Zero Flow Capacity)	Max. Flow Capacity (At Zero Water Head)	(Max.)	(Min.)	(Nominal)
WY-01071	150	0.27A/1.60m	0.38A/5.4L/min	≤14V DC	≥9V DC	12V DC
WY-01072	130	0.26A/1.54m	0.37A/5.4L/min	≤14V DC	≥9V DC	12V DC
WY-01073	140	0.25A/1.56m	0.37A/5.4L/min	≤14V DC	≥9V DC	12V DC
WY-01074	130	0.26A/1.53m	0.37A/5.4L/min	≤14V DC	≥9V DC	12V DC
Safty and others	compression resistance	500V/10mA/1s	Max. temperature		105℃	
	Insulated resistance	500V≥10MΩ	Noise		≤60dB/10cm Max.	
Mark	1.Runing at noload is not allowed; 2.Reversed wire is not allowed too,otherwise,the pump will be damaged. 3.using hose with Φ9(I.D)to test flow capacity and water head.					
Confirmation of customer:						
Approval			N/G			